

**GENERATOR MODEL: CU50**

**230/400V, 50HZ @ 1500RPM**

<b>Prime Power</b>	<b>50 kVA</b>	<b>40 kW</b>
<b>Standby Power</b>	<b>55 kVA</b>	<b>44 kW</b>



## Features:

- **Warranty: 1 year or 1000 hours.**
- **Cummins as the world's leading power engines manufacturer since 1919.**
- **24/7 after sales support.**
- **Easy and economical availability of Spares.**
- **Advance digital control system, Long service life, Easy to Operate, Low Fuel consumption, Anti vibrating Isolators.**
- **Automatic start (optional), Eco-friendly.**
- **Low oil shutdown safety.**
- **Automatic overload protection safety.**



## Engine

Cummins (China), Model **4BT3.9-G2**, in accordance to ISO3046, ISO 8528, DIN 6271



## Alternator

Stamford-UK, Leroy Somer-France, Meccalte-EU Complying to the following Standards: CEE/CE12/3/EN60034-1 / IEC34-1/VDE



## Control Panel

Deep Sea Electronics DSE-4000/6000 series, Made in UK, Comply to standards: BS EN 61000, BS EN 60950, BS EN



## Fuel Tank

The overall fuel tank capacity: 125 LTR.



## Dimensions

L x W x H = 5.75 x 2.6 x 3.93 (without Canopy)

# ENGINE TECHNICAL DATA



SCHEMA




FUEL

LUBE SYSTEM




COOLING

AIR INTAKE



EXHAUST

Engine Make	Cummins
Engine Model	4BT3.9-G2
Number Of Cylinders	4
Cylinder Arrangement	Vertical In Line
Bore and Stroke	102 mm x 120 mm
Governor Type	Mechanical
Displacement	3.9 L
Compression Ratio	16.5:1
Aspiration	Naturally Aspired
Cycle	4 Stroke
Combustion System	Direct Injection
Rotation	Anti-clockwise, viewed on flywheel
Cooling System	Water - Cooled
Frequency and Engine Speed	50Hz and 1500 rpm
Gross Engine Power (Prime)	58 kW / 78 h.p
Gross Engine Power (Standby)	64 kW / 86 h.p
Fuel Consumption	
100% Load (L/hr)	13
75% Load (L/hr)	10
50% Load (L/hr)	06
Fuel Tank Capacity	125 Ltr
Lubrication System Capacity	11 Ltr
Total Coolant Capacity	21.0 Ltr
Radiator Cooling Air Flow	2.4 m <sup>3</sup> /sec
Combustion Air Flow	2.7 m <sup>3</sup> /min
Exhaust Gas Flow (Prime)	6.1 m <sup>3</sup> /min
Exhaust Gas Flow (Standby)	6.5 m <sup>3</sup> /min
Exhaust Temperature (Prime)	463 °C
Exhaust Temperature (Standby)	487 °C

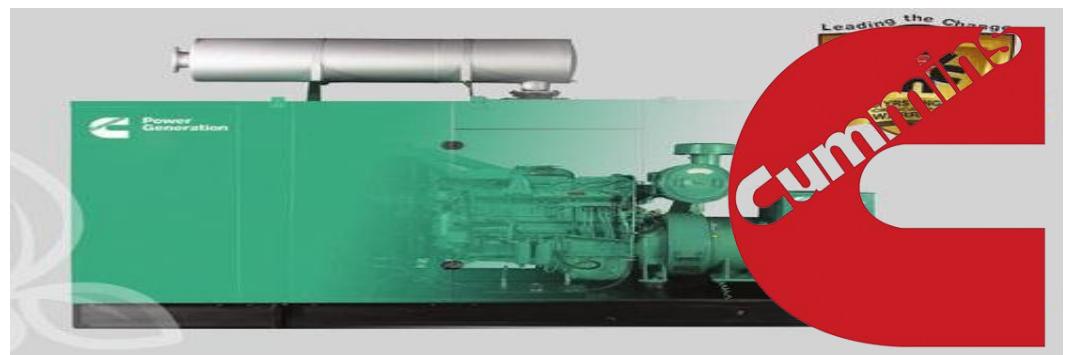

Preview our new **STAMFORD** alternators



## ALTERNATOR TECHNICAL DATA




SCHEMA

Insulation System	Class H
Winding Pitch	2/3 to Minimize Harmonics effects
Number of Poles	4
Number of Bearings	Single Bearing
RPM	1500 RPM
Power Factor	0.8/1
Regulation	± 1%
Frequency	50 Hz
Voltage Range	380-415 / 220-240
IP Rating (Protection)	Ip23

Synchronous, 3/1 phase, Brushless & Self Excited

**NOTE:** Alternator Brand & Model is subject to availability.

Preview our new **STAMFORD** alternators

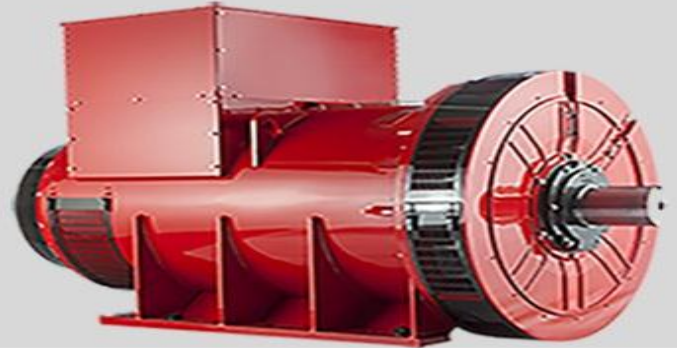

## CONTROL MODULE

DEEP SEA ELECTRONICS  
(DSE-4000/6000/7000 Series)



### INDICATORS

- ✔ Operating Hours
- ✔ 3 Phase Generator Voltage Sensing & Monitoring
- ✔ Current Protection & Monitoring
- ✔ Power Measurement (kW, kVA, kVA<sub>r</sub>, kWh, kVAh, kVA<sub>r</sub>h, pf)
- ✔ Frequency Monitoring (Hz)
- ✔ Oil Pressure/Coolant Temperature
- ✔ Battery Voltage Monitoring (DC)
- ✔ Alarm Acknowledge



### CONTROLS

- ✔ Engine Cool Down Timer
- ✔ Emergency Stop Push button/ Alarm Acknowledge
- ✔ Warm-up Timer
- ✔ Load Switching Timer
- ✔ Engine Cycle Crank



### WARNING & SHUTDOWN ALARM

- ✔ Generator Over/Under Voltage & Frequency
- ✔ Crank Disconnect (Failure to Start)
- ✔ Under/Over Speed
- ✔ Over Current
- ✔ Low Oil Pressure
- ✔ High Water Temperature
- ✔ Low Fuel Level
- ✔ Low Water Level



### FEATURES

- ✔ User Friendly
- ✔ Compatible With CAN Engines
- ✔ License Free Software
- ✔ Largest Backlit Icon Display In Its Class
- ✔ Fully Configured Via The Fascia Or Pc Using Usb
- ✔ Efficient Power Save Mode

